


**PARAMETERS**

Impedance	8 ohms
Re	7.3 ohms
Le	0.53 mH @ 1kHz
Fs	123 Hz
Qms	5.75
Qes	0.58
Qts	0.53
Mms	2.72 g
Cms	0.61 mm/N
Sd	25.4 cm <sup>2</sup>
Vd	4.57 cm <sup>3</sup>
BL	5.17 Tm
Vas	0.55 liters
Xmax	1.8 mm
VC Diameter	16 mm
SPL	85 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	22 watts
Usable Frequency Range (Hz)	100 - 15,000 Hz

**IMPEDANCE/PHASE**

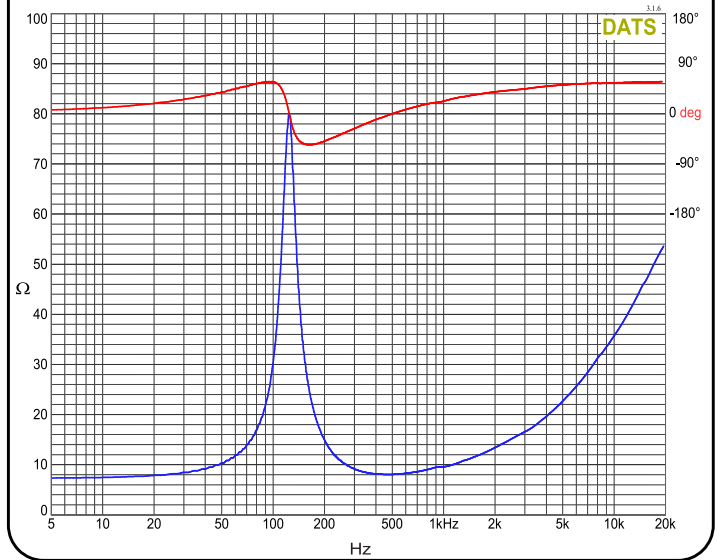

**FEATURES**

- High economic value
- Delivers crisp, clear audio, ensuring an immersive listening experience
- High-quality audio solutions without breaking the bank, ideal for budget-conscious projects
- Suitable for commercial installations, DIY projects, art exhibits, and more

**FREQUENCY RESPONSE**

