

**PARAMETERS**

Impedance	4 ohms
Re	3.2 ohms
Le	0.22 mH
Fs	320 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	32 mm
SPL	N/A
RMS Power Handling	20 watts
Usable Frequency Range (Hz)	N/A


**FEATURES**

- Dual steel spider design to better support the large neodymium motor
- 32 mm two layer voice coil for high, 20 watts RMS, power handling
- Pre-applied 3M™ VHB™ adhesive for quick, secure installation
- 4 ohms impedance to make the most out of small class D amplifiers

**APPLICATIONS**


- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

**IMPEDANCE/PHASE**

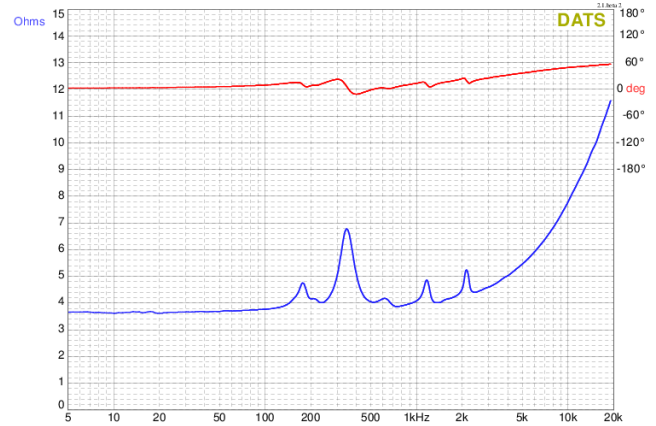

Measurement taken with transducer uncoupled facing upward.

**FREQUENCY RESPONSE**

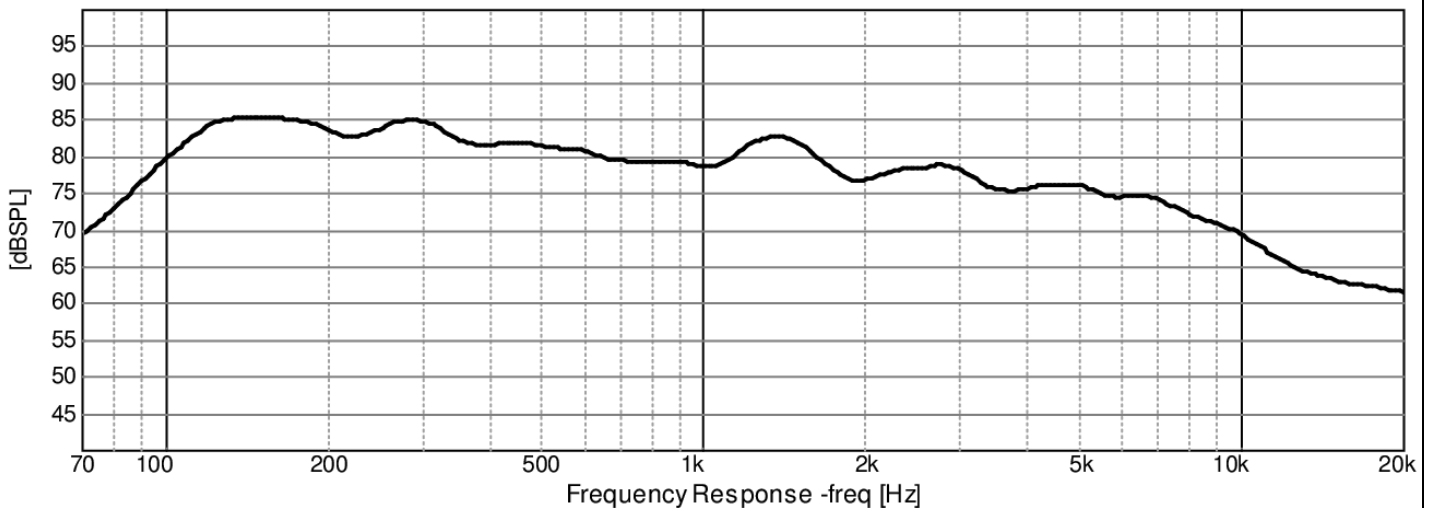

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.