

NS270-PR

10" Cast Frame Passive Radiator





Features

- Flat honeycomb fiberglass cone
- Low profile die-cast frame
- High excursion stable suspension
- Inverted deep-roll rubber surround
- Unique mass loading apparatus (mass included)
- Same cosmetics as NS Series drivers, can be used with others

Parameters

Impedance (Ω)	
Re (Ω)	
Le (mH) @ 1 kHz	
Fs (Hz)	23.6
Qms	6.00
Qes	
Qts	
Mms (g)	200
Cms (mm/N)	0.23
Sd (cm ²)	324
Vd (liters)	340
BL (Tm)	
VAS (liters)	35.0
XMAX (mm)	10
VC Diameter (mm)	
SPL (dB@1W/1m)	
RMS Power Handling (W)	
Usable Frequency Range (Hz)	

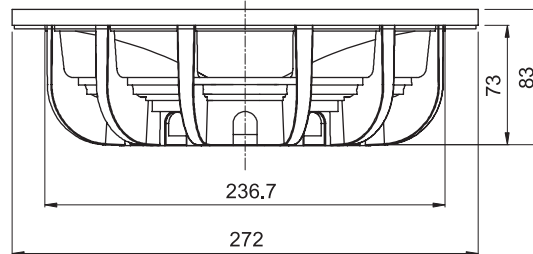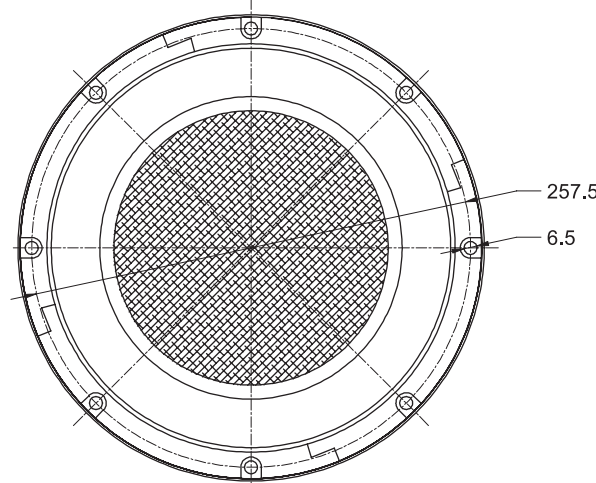

Note: All dimensions in mm.

Frequency Response

N/A

Impedance/Phase

N/A