
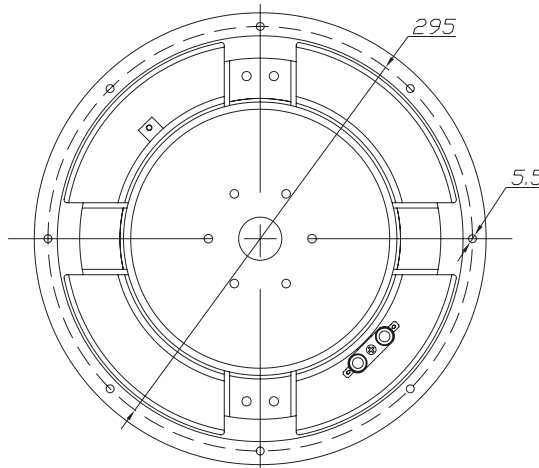


Features

- Black anodized aluminum cone
- 2-1/2" 2-layer voice coil
- Triple-shorting-ring motor
- Fully vented construction
- Rigid cast frame
- Rubber surround
- High power handling


Parameters

Impedance (Ω)	8
Re (Ω)	6.9
Le (mH) @ 1 kHz	1.45
Fs (Hz)	27.6
Qms	3.16
Qes	0.68
Qts	0.56
Mms (g)	158.4
Cms (mm/N)	0.21
Sd (cm ²)	506.7
Vd (liters)	623.2
BL (Tm)	16.75
VAS (liters)	78.2
XMAX (mm)	12.3
VC Diameter (mm)	64
SPL (dB@1W/1m)	86.0
RMS Power Handling (w)	400
Usable Frequency Range (Hz)	25 - 1000

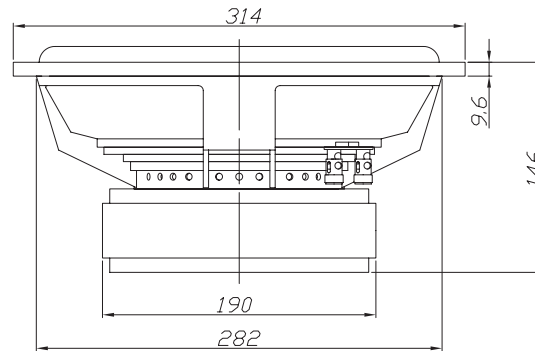

Note: All dimensions in mm.

Frequency Response

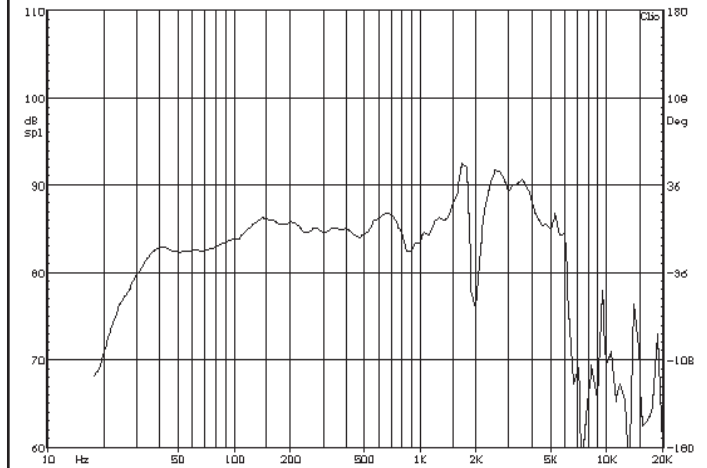

Note: Due to testing limitations, response below 200 Hz is not an actual representation.

Impedance/Phase

