





# TD24F-4 1" Soft Dome Neodymium Tweeter 4 Ohm

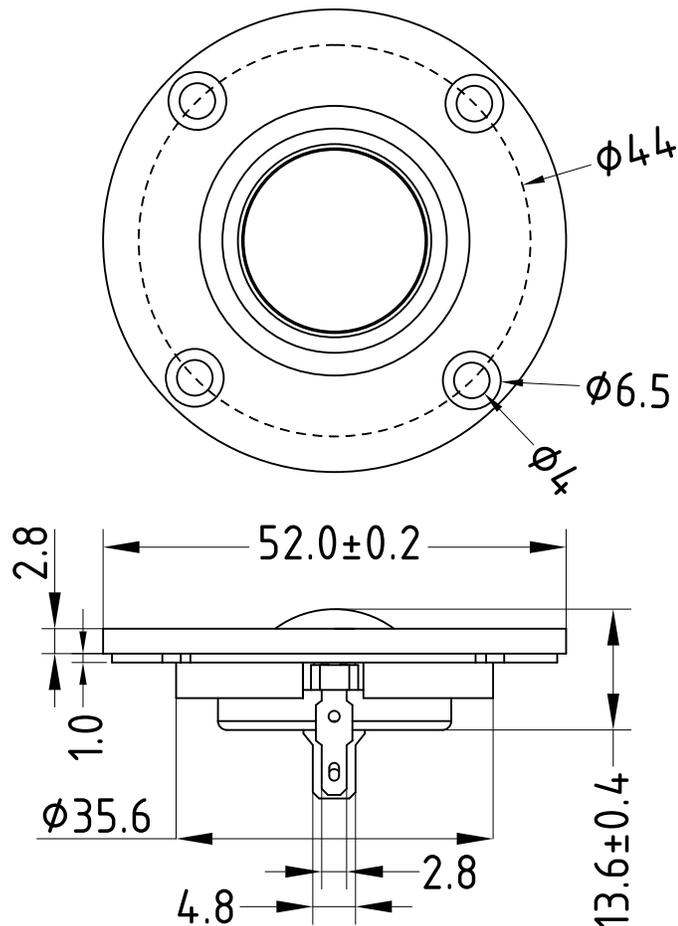

## PARAMETERS

Impedance:	4 ohms
Re:	3.5 ohms
Le:	0.12 mH
Fs:	1,667 Hz
Qms:	—
Qes:	—
Qts:	—
Mms:	—
Cms:	—
Sd:	—
Vd:	—
BL:	—
Vas:	—
Xmax:	—
VC Diameter:	24 mm
SPL:	90 dB@2.83V/1m
RMS Power handling:	25 watts
Usable Frequency Range (Hz):	3,000 – 25,000 Hz

## IMPEDANCE/PHASE

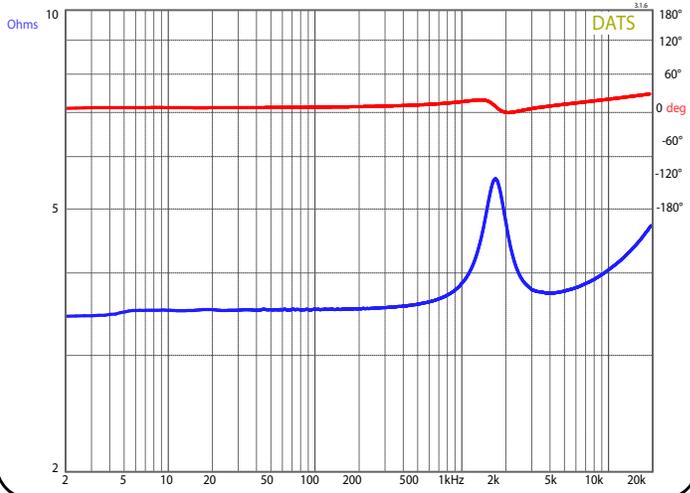

## FEATURES

- 1" fabric dome provides detailed high frequency reproduction
- Ferrofluid for improved power handling and damping
- Flat frequency response with wide dispersion
- Neodymium magnet minimizes size for installation almost anywhere

## FREQUENCY RESPONSE

