



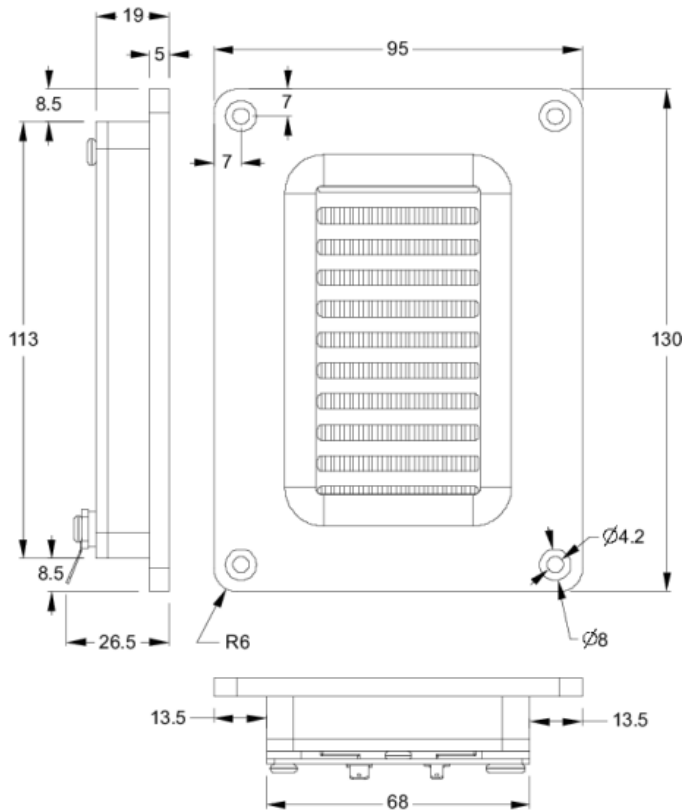

PARAMETERS

Impedance	4 ohms
Re	3.7 ohms
Le	N/A
Fs	875 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	32.54 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	93 dB @ 2.83V/1m
RMS Power handling	25 watts
Usable Frequency Range (Hz)	1,900 – 40,000 Hz


IMPEDANCE/PHASE

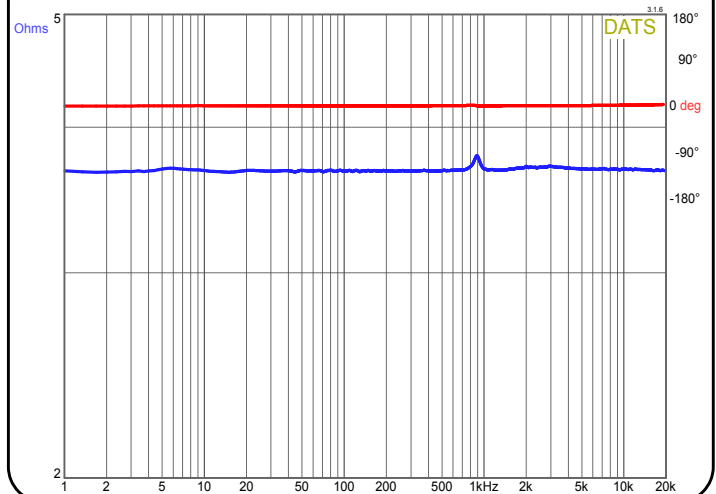

FEATURES

- Advanced Air Motion Transformer design delivers smooth response up to 40,000 Hz
- Folded Kapton ribbon diaphragm delivers clean, detailed, and highly dynamic output
- Robust metal faceplate provides secure, stable mounting
- Wide bandwidth facilitates integration with larger midwoofers
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency

FREQUENCY RESPONSE

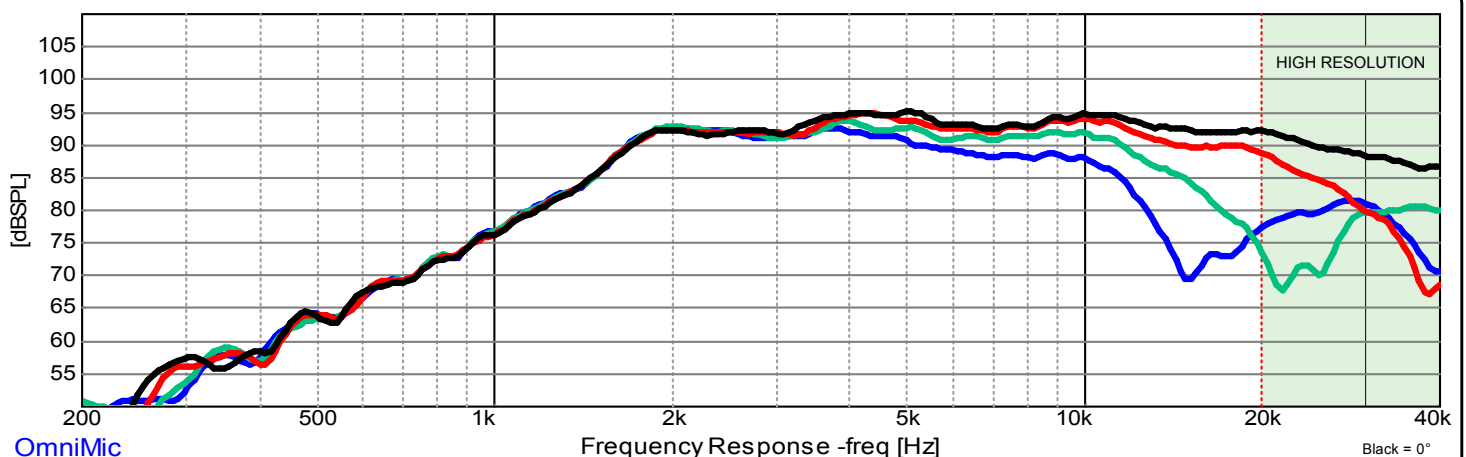

Note: 1/12th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°