




AMTPRO-4 Air Motion Transformer Tweeter 4 Ohm

AMTPRO-4

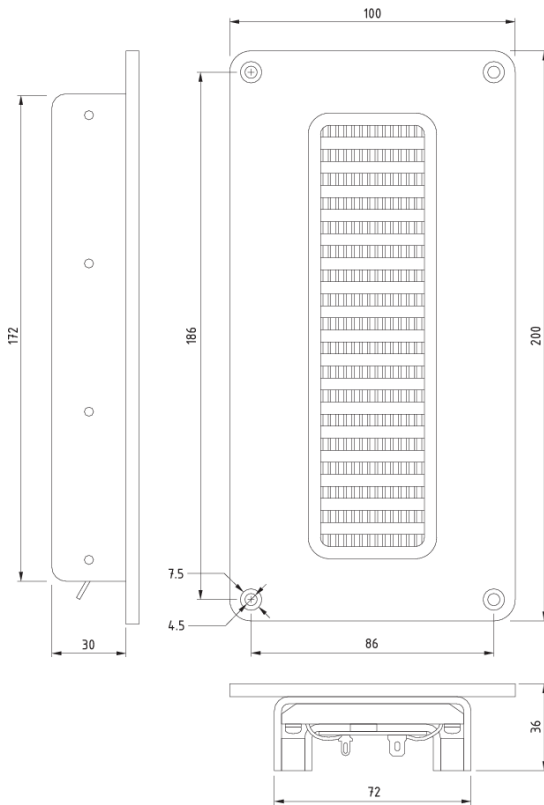

PARAMETERS

Impedance	4 ohms
Re	3.96 ohms
Le	0.06 mH @ 10k Hz
Fs	N/A
Qms	N/A
Qes	N/A
Qts	4.12
Mms	N/A
Cms	N/A
Sd	54.72 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	94 dB 1W/1m
RMS Power Handling	50 watts
Usable Frequency Range (Hz)	800 - 18,000 Hz


FEATURES

- Advanced Air Motion Transformer design "squeezes" air molecules instead of shoving or crushing them
- Folded Kapton ribbon diaphragm delivers clean, detailed, and highly dynamic output
- Robust metal faceplate provides secure, stable mounting
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency
- Open back design permits dipole or chamber loading

IMPEDANCE/PHASE



FREQUENCY RESPONSE

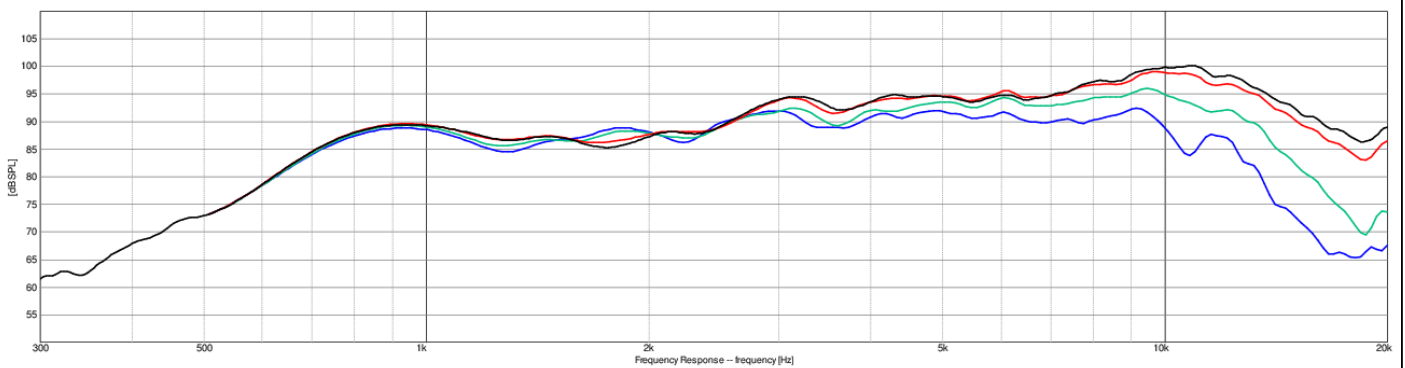

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°