





# AMT Mini-8 Hi-Res Air Motion Transformer Tweeter 8 Ohm

AMT Mini-8

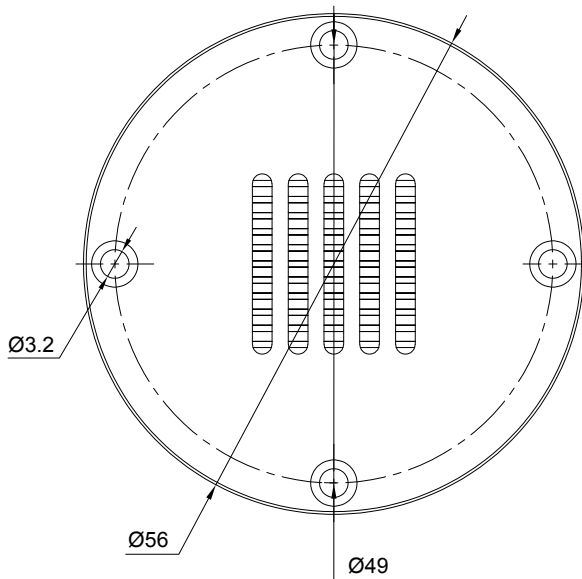


## PARAMETERS

Impedance	8 ohms
Re	7 ohms
Le	N/A
Fs	N/A
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	3.8 cm <sup>2</sup>
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	89 dB @ 2.83W/1m
RMS Power Handling	15 watts
Usable Frequency Range (Hz)	4,000 - 40,000 Hz

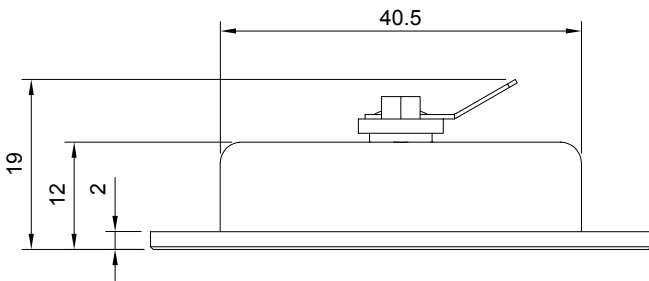

## IMPEDANCE/PHASE

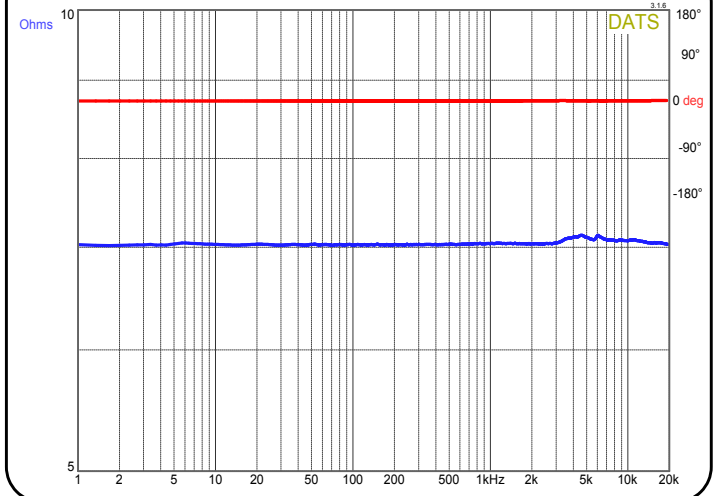

## FEATURES

- Advanced Air Motion Transformer design delivers smooth response up to 40,000 Hz
- Folded Kapton ribbon diaphragm delivers clean, detailed, and highly dynamic output
- Compact design and Hi-Res capability, ideal for use as a super tweeter
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency

## FREQUENCY RESPONSE

