


PARAMETERS

Impedance	4 ohms
Re	4.06 ohms
Le	N/A
Fs	N/A
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
VAS	N/A
XMAX	N/A
VC Diameter	N/A
SPL	94 dB 2.83V/1m
RMS Power Handling	25 watts
Usable Frequency Range	1,800 - 33,000 Hz


IMPEDANCE/PHASE

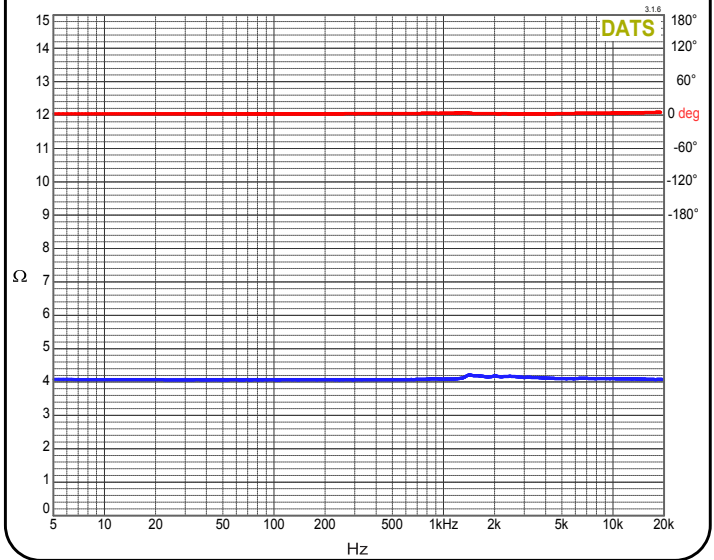

FEATURES

- High-resolution design plays up to 35k
- AMT Technology 'Squeezes' air to produce lifelike-detail
- Flat impedance curve and low inductance for simple crossover design
- Powerful, lightweight neodymium magnet structure for low distortion and high efficiency
- Sealed rear chamber eliminates need for a separate enclosure
- Robust metal faceplate provides secure, stable mounting

FREQUENCY RESPONSE

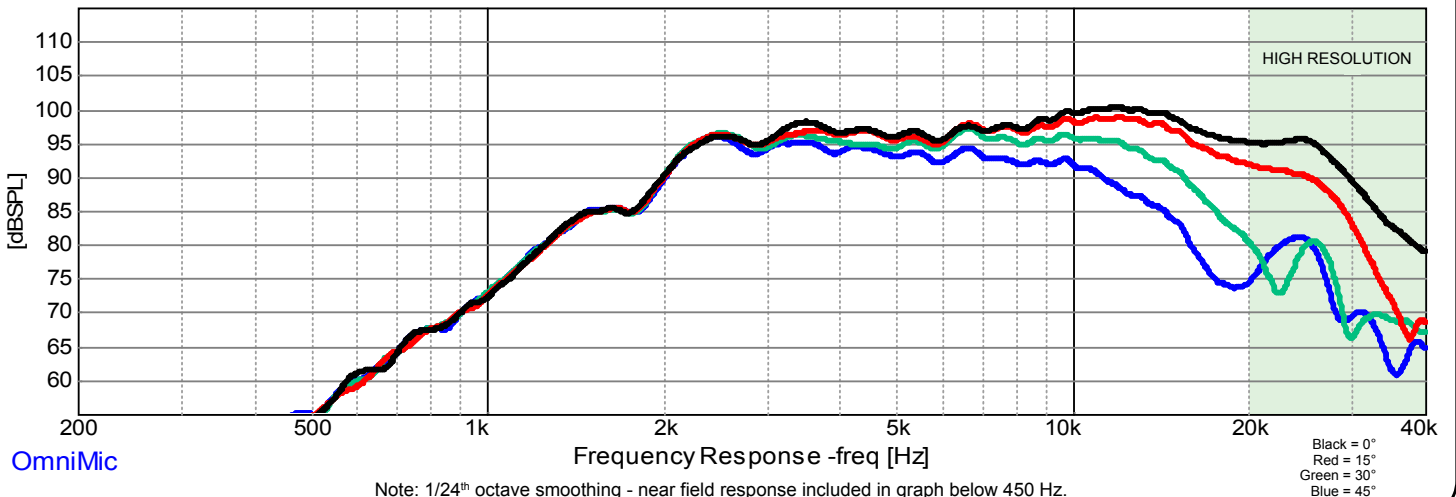

Note: 1/24th octave smoothing - near field response included in graph below 450 Hz.