





AMTPOD-4 Hi-Res AMT Automotive Tweeter 4 Ohm

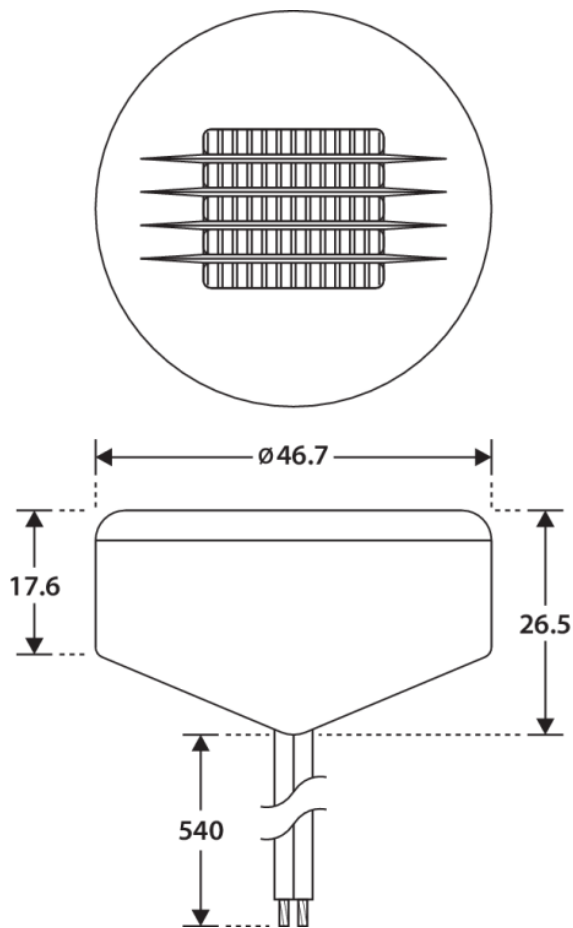

PARAMETERS

Impedance	4 ohms
Re	3.1 ohms
Le	N/A
Fs	N/A
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	4.7 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	90 dB @ 2.83V/1m
RMS Power handling	15 watts
Usable Frequency Range (Hz)	4,500 – 40,000 Hz

IMPEDANCE/PHASE

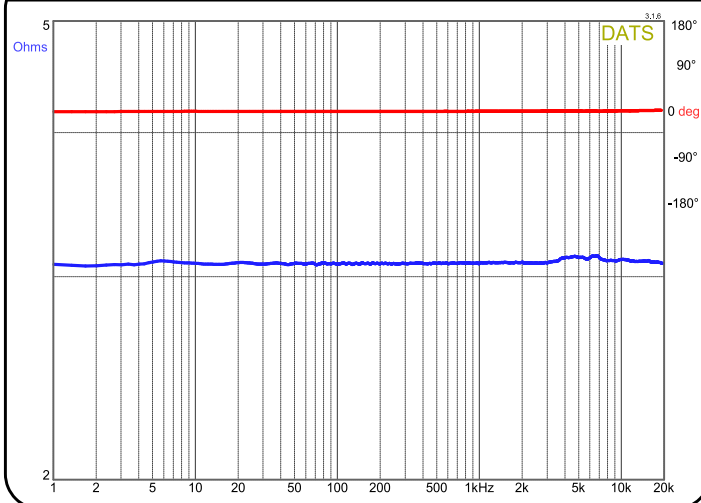

FEATURES

- Advanced Air Motion Transformer design delivers smooth response up to 40,000 Hz
- Folded Kapton diaphragm delivers clean and dynamic output
- Excellent off axis response, ideal for less than optimal installation locations
- Angled enclosure can be placed anywhere in your vehicle
- Includes 3M VHB mounting tape and connecting leads

FREQUENCY RESPONSE

