




AMTPOD-4 Motion Transformer Automotive Tweeter


AMTPOD-4

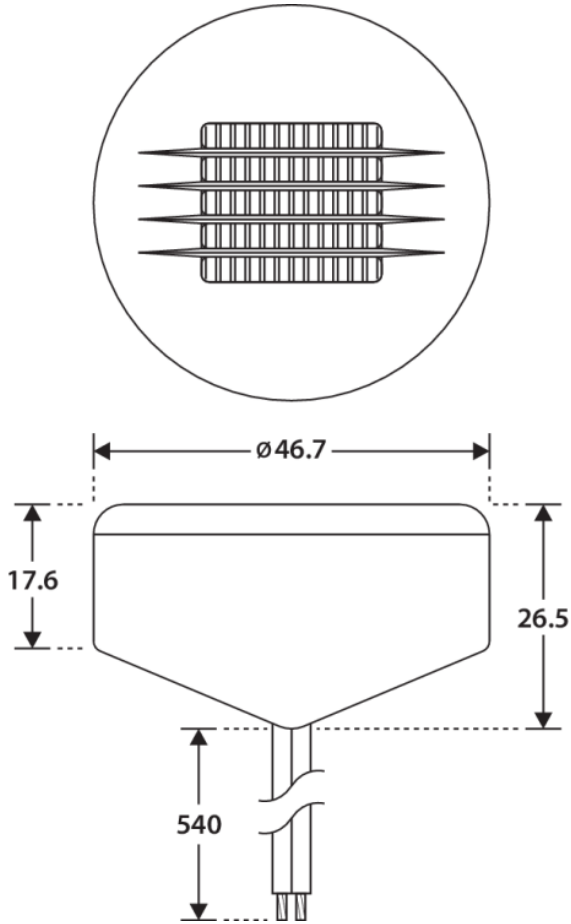

PARAMETERS

Impedance	4 ohms
Re	2.9 ohms
Le	N/A
Fs	N/A
Qms	2.09
Qes	N/A
Qts	2.06
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	90 dB @ 2.83V/1m
RMS Power Handling	15 watts
Usable Frequency Range (Hz)	4,500 - 25,000 Hz


IMPEDANCE/PHASE

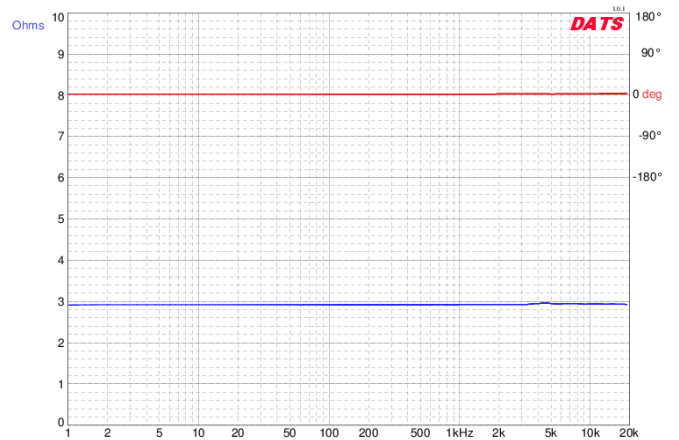

FEATURES

- Air Motion Technology, for detailed, non-fatiguing treble
- Extended, open, dynamic high-frequency performance
- Angled enclosure can be placed anywhere in your vehicle
- Pleated Kapton diaphragm with aluminum conductor for high power handling
- Includes 3M VHB mounting tape and connecting leads

FREQUENCY RESPONSE

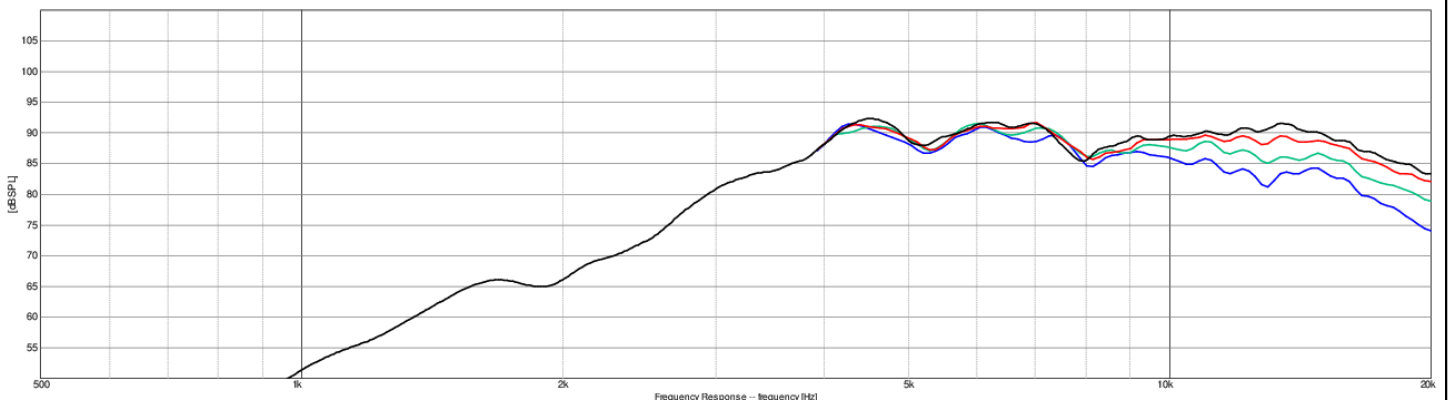

Note: 1/12th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°