




2-1/2" Shielded Extended Range Speaker Driver 8 Ohm

CE65W-8

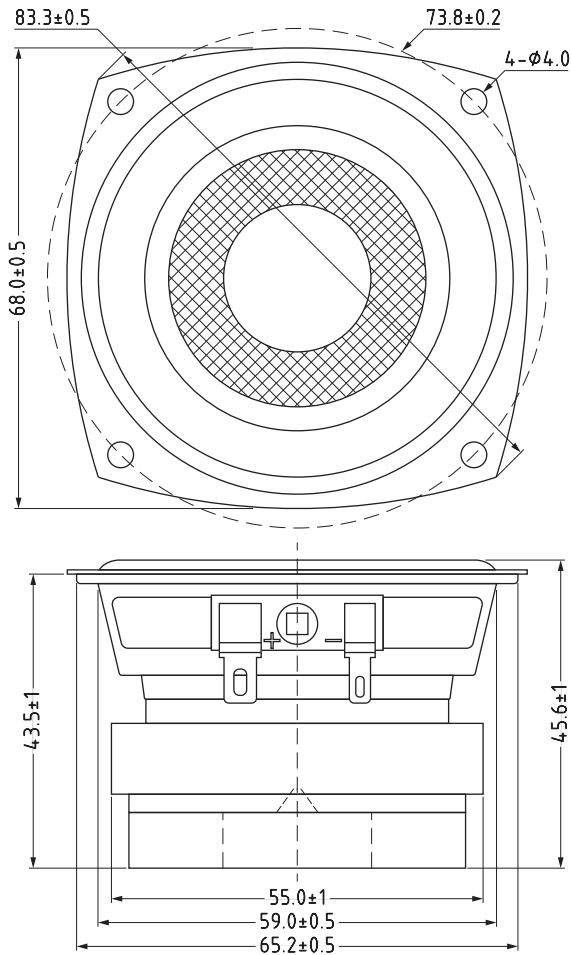


FEATURES

- Woven glass-fiber cone delivers wide bandwidth full-range response
- Rubber surround and large flat spider for long-term durability
- Video-shielded magnet for use near sensitive electronics
- Large magnet structure for control and efficient output
- Robust, compact design


PARAMETERS

Impedance:	8 ohms
Re:	6.9 ohms
Le:	0.15 mH
Fs:	112 Hz
Qms:	4.27
Qes:	0.95
Qts:	0.78
Mms:	2.0g
Cms:	1.01 mm/N
Sd:	20.1 cm ²
Vd:	4 cm ³
BL:	3.2 Tm
Vas:	0.58 liters
Xmax:	2 mm
VC Diameter:	20 mm
SPL:	82 dB@2.83V/1m
RMS Power handling:	7 watts
Usable Frequency Range (Hz):	80-17,000 Hz

IMPEDANCE/PHASE

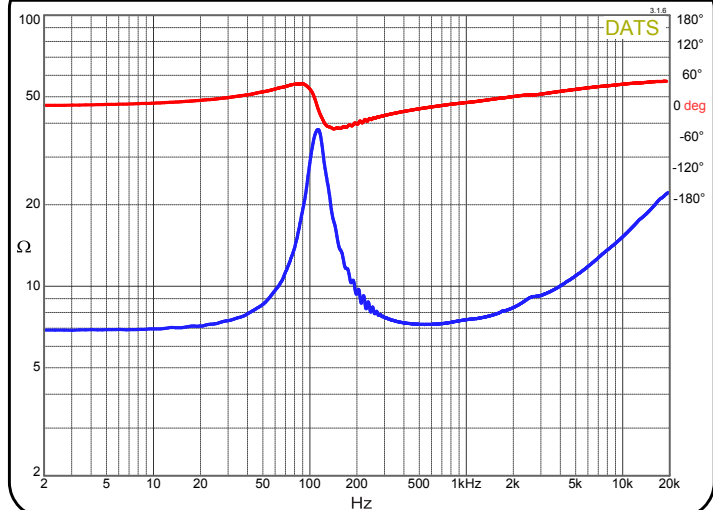

FREQUENCY RESPONSE

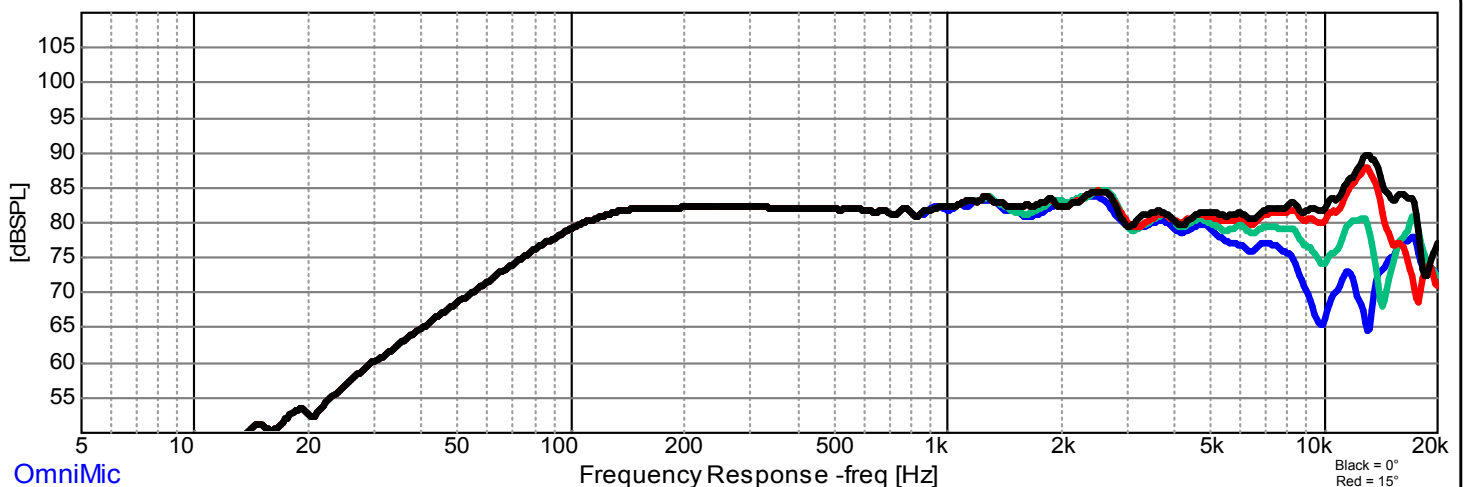

Note: 1/24th octave smoothing - near field response included in graph below 450 Hz.