
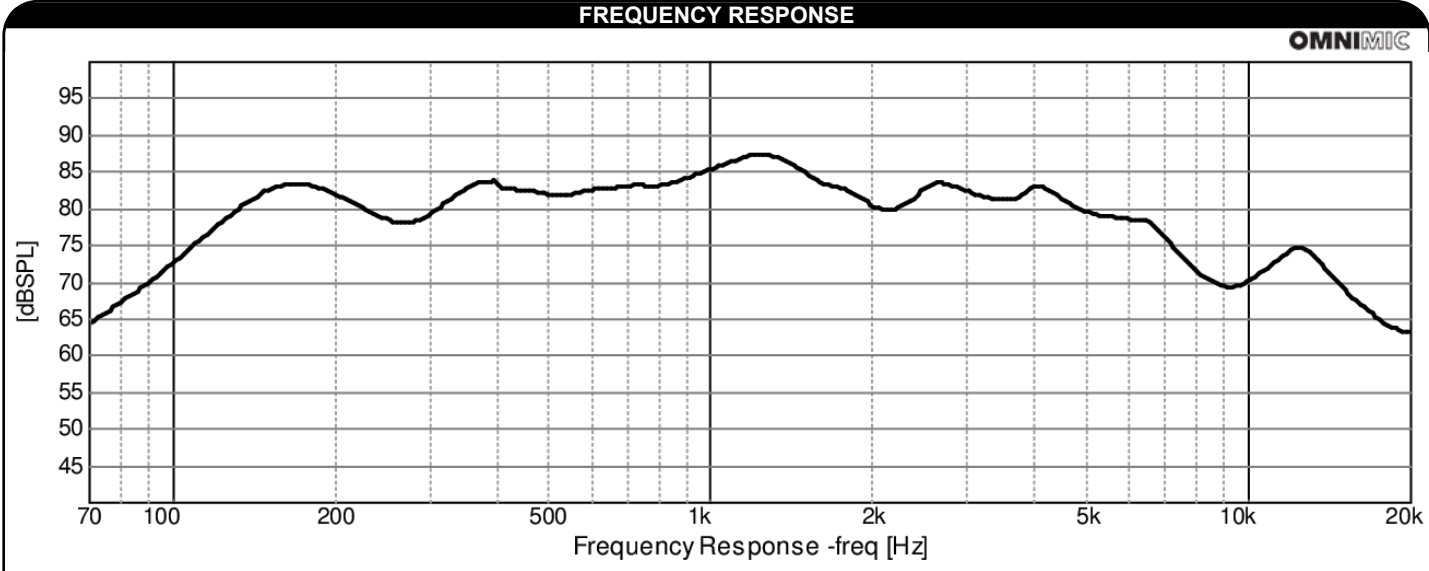


PARAMETERS	
Impedance	4 ohms
Re	4.2 ohms
Le	0.24 mH @ 1 kHz
Fs	230 Hz
Qms	N/A
Qes	N/A
Qts	0.83
Mms	1.75 g
Cms	0.0003 mm/N
Sd	N/A
Vd	N/A
BL	3.86 Tm
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	N/A
RMS Power Handling	20 watts
Usable Frequency Range (Hz)	N/A

- ### FEATURES
- Small size; just over 2" diameter, about 7/8" high
 - Pre-applied 3M™ VHB™ adhesive for quick, secure installation
 - Rare-earth neodymium motor and a proprietary voice coil
 - 4 ohms impedance for use with small, Class D amplifiers
 - 20 watt RMS power handling for high output

- ### APPLICATIONS
- Invisible home theater and multi-room audio
 - Electronic gaming machines
 - Advertising signage
 - Point-of-purchase displays
 - Multimedia exhibits
 - Commercial distributed audio
 - Kiosks
 - Automotive audio
 - Bathroom tubs and showers

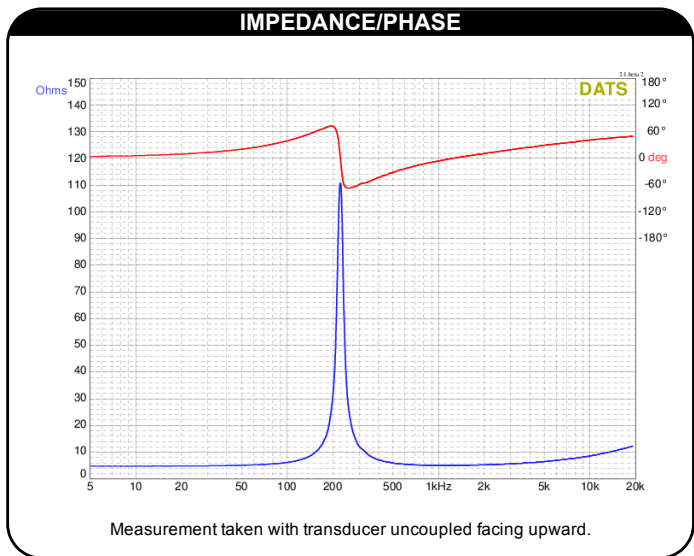

OmniMic

1/3rd octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.