



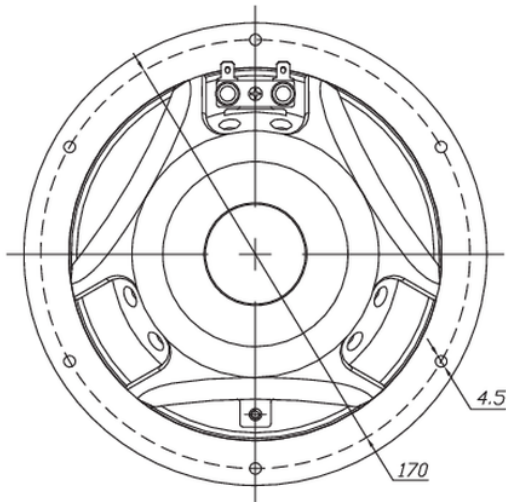

PM180-8 6-1/2" Neo Wideband Midbass Driver

PM180-8

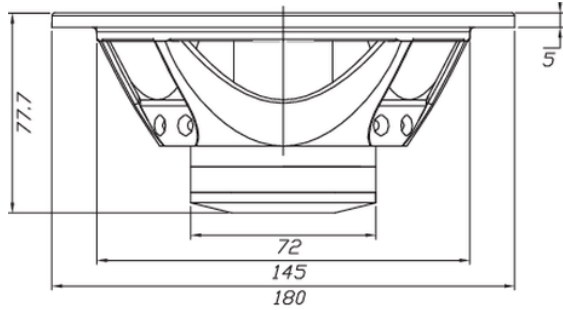

PARAMETERS

Impedance	8 ohms
Re	6.4 ohms
Le	0.68 mH @ 1 kHz
Fs	53.2 Hz
Qms	4.13
Qes	0.30
Qts	0.28
Mms	8.2g
Cms	1.1 mm/N
Sd	130.69 cm ²
Vd	0.653 cm ³
BL	7.7 Tm
Vas	28 liters
Xmax	4.6 mm
VC Diameter	25 mm
SPL	94.4 dB @ 2.83V/1m
RMS Power Handling	30 watts
Usable Frequency Range (Hz)	55 - 12,000 Hz


FEATURES

- Klippel-optimized, high-performance design
- Neodymium ring motor with underhung geometry
- Kevlar-reinforced paper cone for excellent detail
- Perfect complement for ribbon and planar tweeters
- Wide bandwidth meets high 94 dB sensitivity

IMPEDANCE/PHASE



FREQUENCY RESPONSE

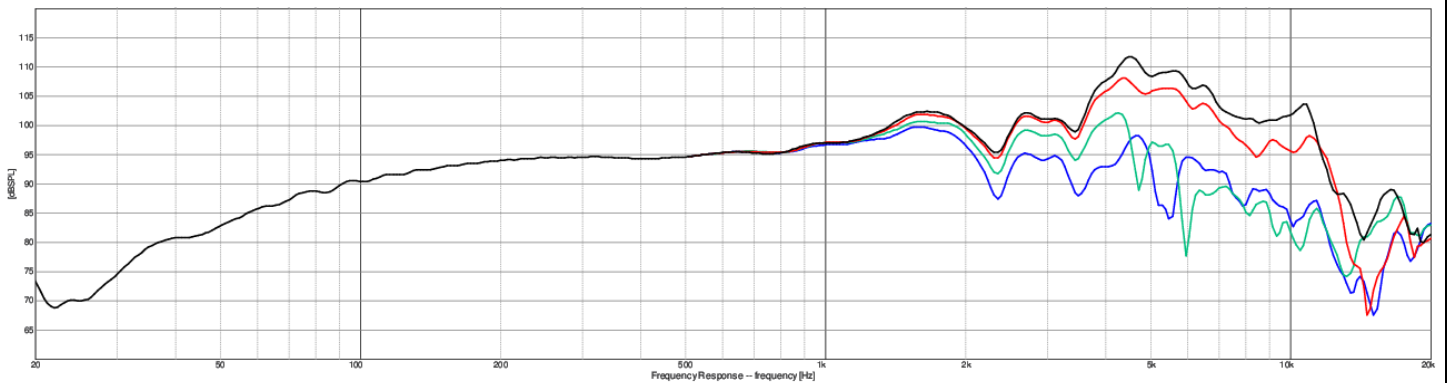

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°