


PARAMETERS

Impedance	4 ohms
Re	3.3 ohms
Le	0.51 mH @ 1 kHz
Fs	37.7 Hz
Qms	1.85
Qes	0.48
Qts	0.38
Mms	25.0g
Cms	0.71 mm/N
Sd	213.8 cm ²
Vd	128.2 cm ³
BL	6.4 Tm
Vas	45.8 liters
Xmax	6 mm
VC Diameter	38.5 mm
SPL	92.9 dB @ 2.83V/1m
RMS Power Handling	80 watts
Usable Frequency Range (Hz)	35 - 5,500 Hz


FEATURES

- Three-part paper composite diaphragm featuring paper, Kevlar, and glass fibers
- Low-distortion motor, 6-hole cast frame, rubber surround, and solid aluminum phase plug
- Perfect for use as a woofer, midwoofer, or dedicated midrange driver
- 92.9 dB sensitivity and 6 mm of excursion

IMPEDANCE/PHASE

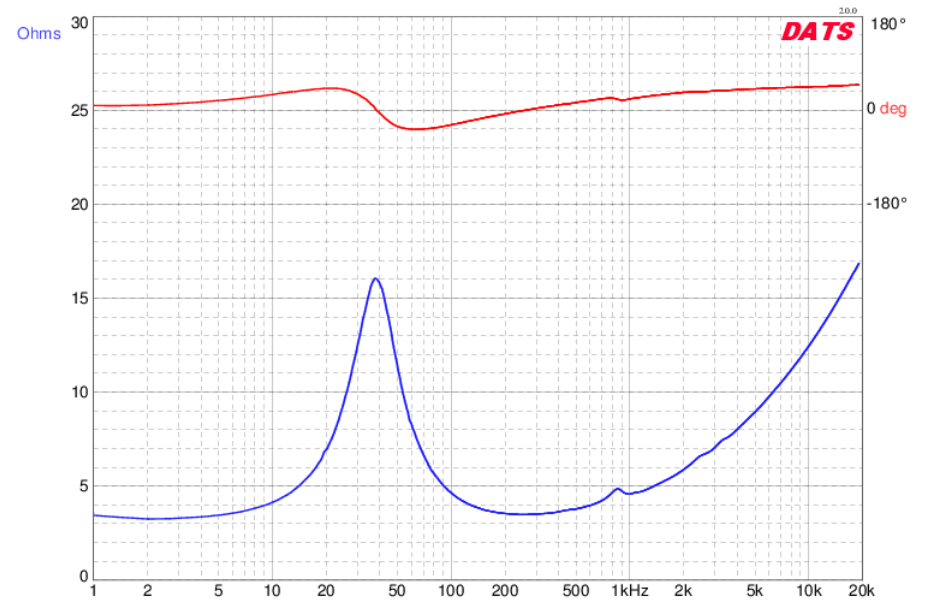

FREQUENCY RESPONSE

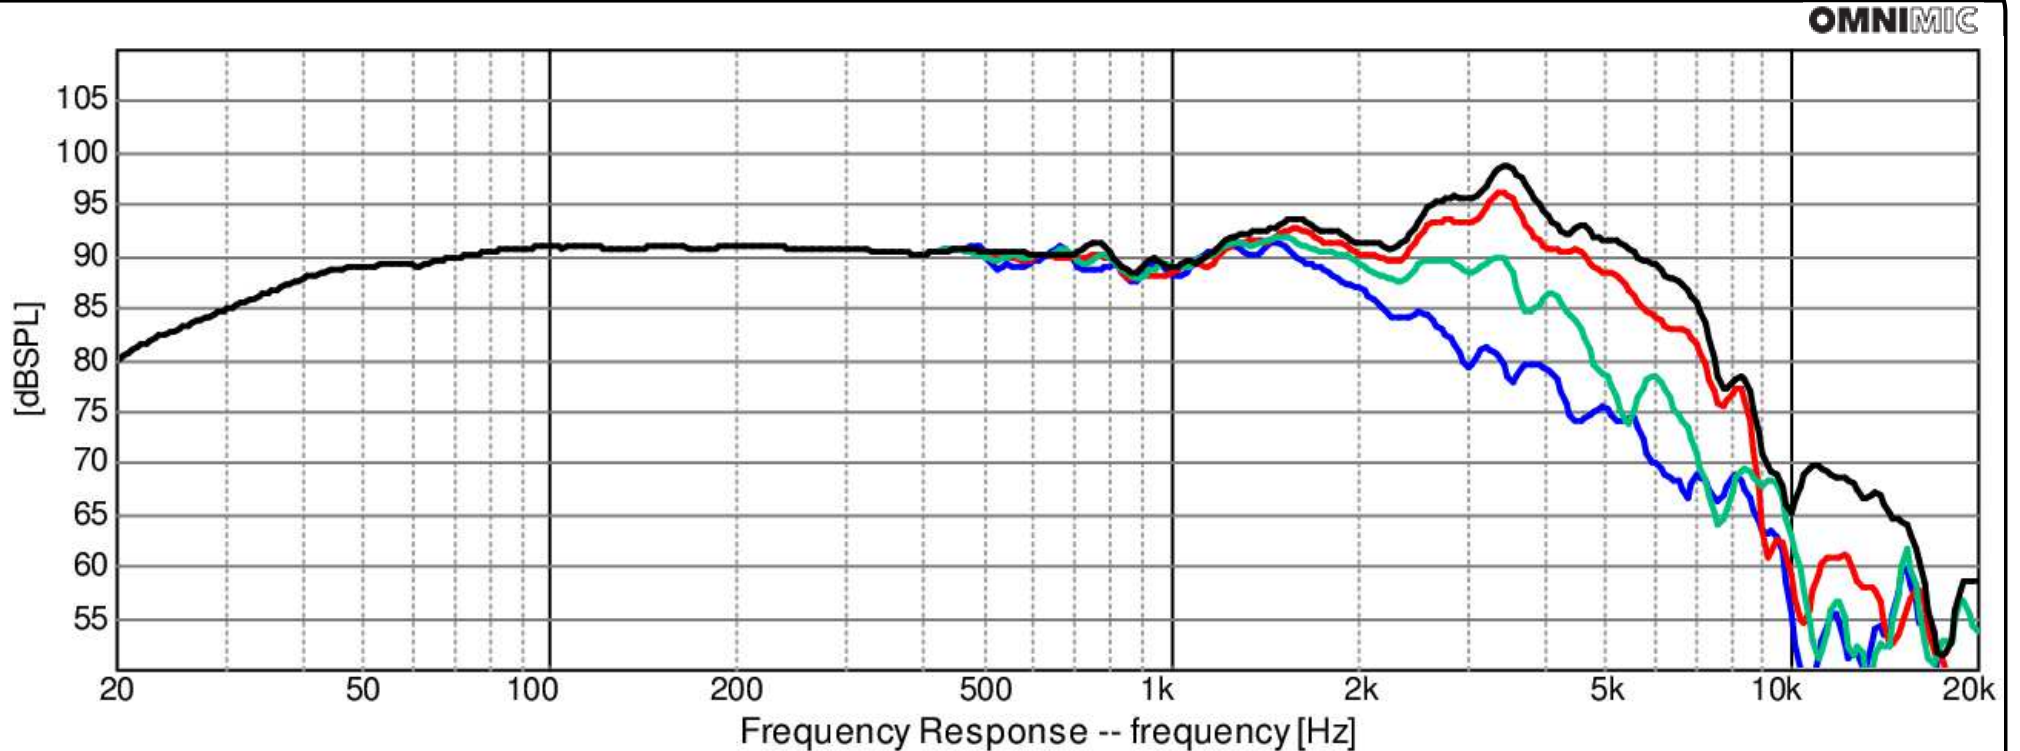

OmniMic

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°