




PCS115-4 4" Poly Cone Woofer 4 Ohm

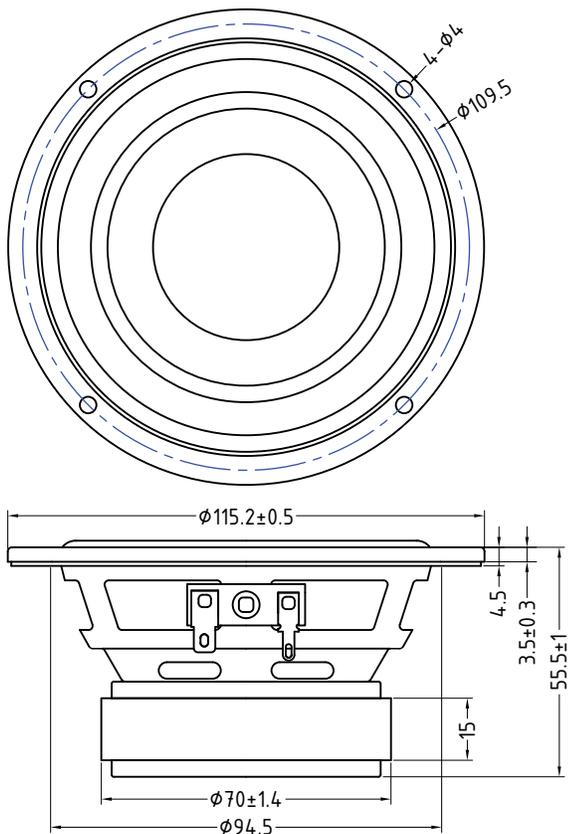


PARAMETERS

Impedance:	4 ohms
Re:	3.6 ohms
Le:	0.37 mH
Fs:	88 Hz
Qms:	3.11
Qes:	1.05
Qts:	0.79
Mms:	6.95g
Cms:	0.47 mm/N
Sd:	51.5 cm ²
Vd:	14.2 cm ³
BL:	3.6 Tm
Vas:	1.77 liters
Xmax:	2.75 mm
VC Diameter:	25 mm
SPL:	86.1 dB@2.83V/1m
RMS Power handling:	20 watts
Usable Frequency Range (Hz):	60 – 5,200 Hz

FEATURES

- Poly cone with rubber surround for smooth response and long-term reliability
- Compact driver with low-profile frame ideal for surface-mounted installs
- 86.1 dB sensitivity for efficient output from modest amplifier power
- Aluminum former with 2-layer voice coil for improved power handling
- Under-spider venting and ferrite motor for consistent performance with lower compression

IMPEDANCE/PHASE

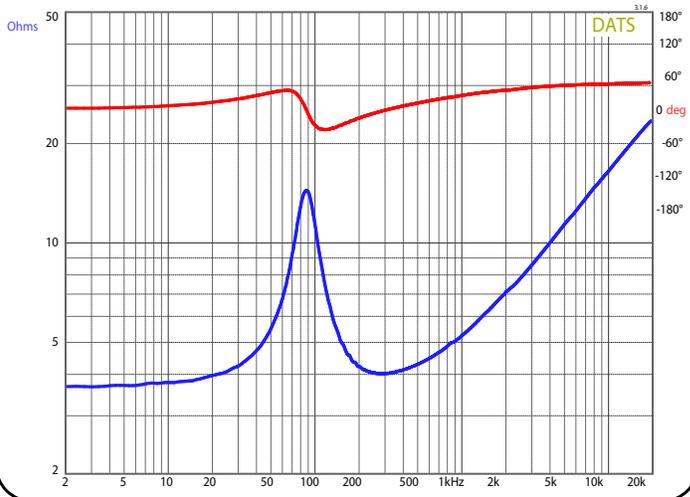

FREQUENCY RESPONSE

