




UNDER-DESK GAMING SUBWOOFER WITH 2.1 AMPLIFIER

Model: GS2.1 User Manual

Thank you for purchasing the Dayton Audio® GS2.1 Subwoofer. Dayton Audio Subwoofers are designed to provide exceptional performance and maximum value. Please read on to discover how to get the most from your new subwoofer.

CONTROLS AND CONNECTIONS

1. POWER SWITCH
2. LED INDICATOR
3. POWER INPUT
4. BASS ADJUSTMENT
5. BINDING POSTS
6. VOLUME CONTROL
7. AUDIO INPUT

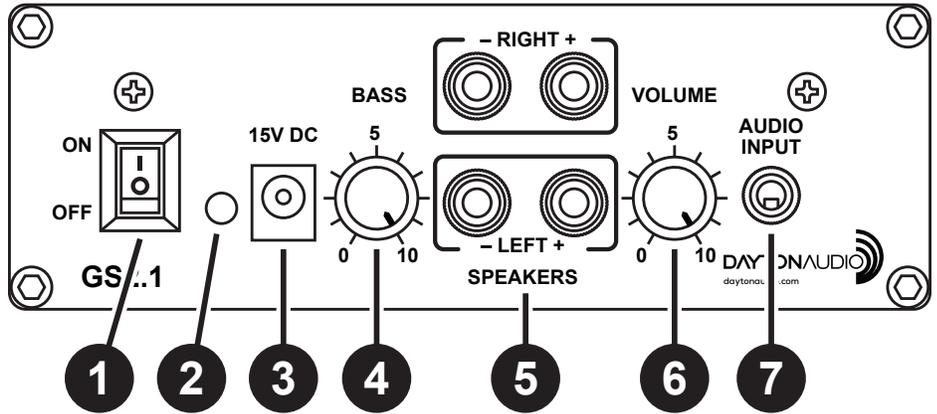

CONNECTING YOUR SPEAKERS

With the power turned OFF, use speaker wire or other high quality wire to connect the powered speaker outputs to your speakers. For distances up to 10 feet, conventional 18AWG wire is acceptable. For longer runs, heavier wire should be used. For proper performance please observe correct polarity.

AUX CONNECTION

Use the AUDIO INPUT to connect external stereo devices to your GS2.1.

CABINET CARE

The finish of your subwoofer can be maintained and enhanced by periodic use of a surface protector such as “Armor All®.” The grills may be vacuumed or gently tapped or brushed to remove dust and debris.

SPECIFICATIONS:

Model:	GS2.1
Description:	Under-Desk Gaming Subwoofer with 2.1 Amplifier
Woofers:	2.5" high-excursion woofer with matching passive radiator
Finish:	Black vinyl
Full range output power:	17W RMS x 2
Subwoofer output power:	23W RMS
DC power input:	15V, 4A (Sold Separately)
Max SPL (calculated):	97 dB
Response:	Subwoofer: 50-150 Hz Full-range Outputs: 150 Hz – 20 kHz
THD+N:	<0.2%
Tuning frequency:	74 Hz
Dimensions:	4-1/4" H* x 8-1/4" W x 5-1/2" D**
	*Includes grill **Includes mounting brackets

Note: Grill is removable, non-see-through cloth

5-Year Limited Warranty
See daytonaudio.com for details



daytonaudio.com
tel + 937.743.8248
info@daytonaudio.com

705 Pleasant Valley Dr.
Springboro, OH 45066
USA

