

4" COMPACT PENDANT/LANDSCAPE SPEAKER 70V/100V/8 OHM WHITE

Model: WP40XTW

Features:

- **Passive Radiator:** Enhances bass performance for deeper, richer audio.
- **Durable Construction:** IP66 weather-resistant ABS plastic for reliable outdoor use.
- **Flexible Mounting:** Pendant, wall, and landscape mounting options included.
- **Versatile Compatibility:** Integrated 70V/100V transformer with 8-ohm bypass for multiple setups.
- **Stylish Finish:** Sleek black or white enclosure suits any aesthetic, from modern to classic.

Applications:

The Dayton Audio WPX Indoor/Outdoor Multi-Purpose Speaker is designed to deliver exceptional audio performance in any setting. Its IP66-rated weather-resistant ABS plastic construction ensures durability in outdoor environments, while its sleek, modern design seamlessly integrates into indoor spaces, making it both functional and stylish.

For ultimate flexibility, the Dayton Audio pendant indoor/outdoor speaker line offers multiple installation options, including pendant mounting, wall mounting, and landscape mounting. Designed to withstand the elements, these speakers feature durable, weather-resistant ABS plastic construction, ensuring long-lasting performance in any environment. Whether you're enhancing an outdoor patio, a commercial venue, or an indoor space, Dayton Audio pendant speakers provide reliable, high-quality sound with versatile mounting configurations to suit your specific needs.

The Dayton Audio Pendants stand out with their built-in passive radiator, delivering extended bass response rarely found in pendant-mount speakers. This innovative feature allows them to significantly outperform sealed pendant speakers of similar size. Ideal for both commercial and residential audio setups, the WPX Pendants ensure a richer, more immersive sound experience in a compact, stylish design.

What's in the Box:

WPX Pendant Speaker
Back Cover
Top Cover
Eyebolt and Nut
Hanging Cable with Carabiner
Mounting Hardware
Landscape Mount
Base Plate
Wall Mount Bracket
Manual




Technical Specifications:


Frequency Response	80-20,000 Hz
Power Handling	20W RMS (40W max)
Speaker Type	2-Way Pendant with Passive Radiator
Sensitivity	84 dB
Impedance	8Ω, 70V/100V
70V Taps	1.25W, 2.5W, 5W, 10W
100V Taps	2.5W, 5W, 10W, 20W
Transducers	
Woofer	4" Graphite Cone with Rubber Surround
Tweeter	3/4" Silk Dome
Max SPL (8 Ohm, 2.83V/1m)	99 dB
Coverage Angle	120°
General	
Dimensions (H x W)	9.25 x 5.875 in. 235 x 147.8 mm
Weight	4.65 lbs. (2.11 kg)
Ingress Protection Rating	IP66
Color	White

All specifications are accurate at the time of printing. Dayton Audio reserves the right to make improvements without notice.


Frequency Response:

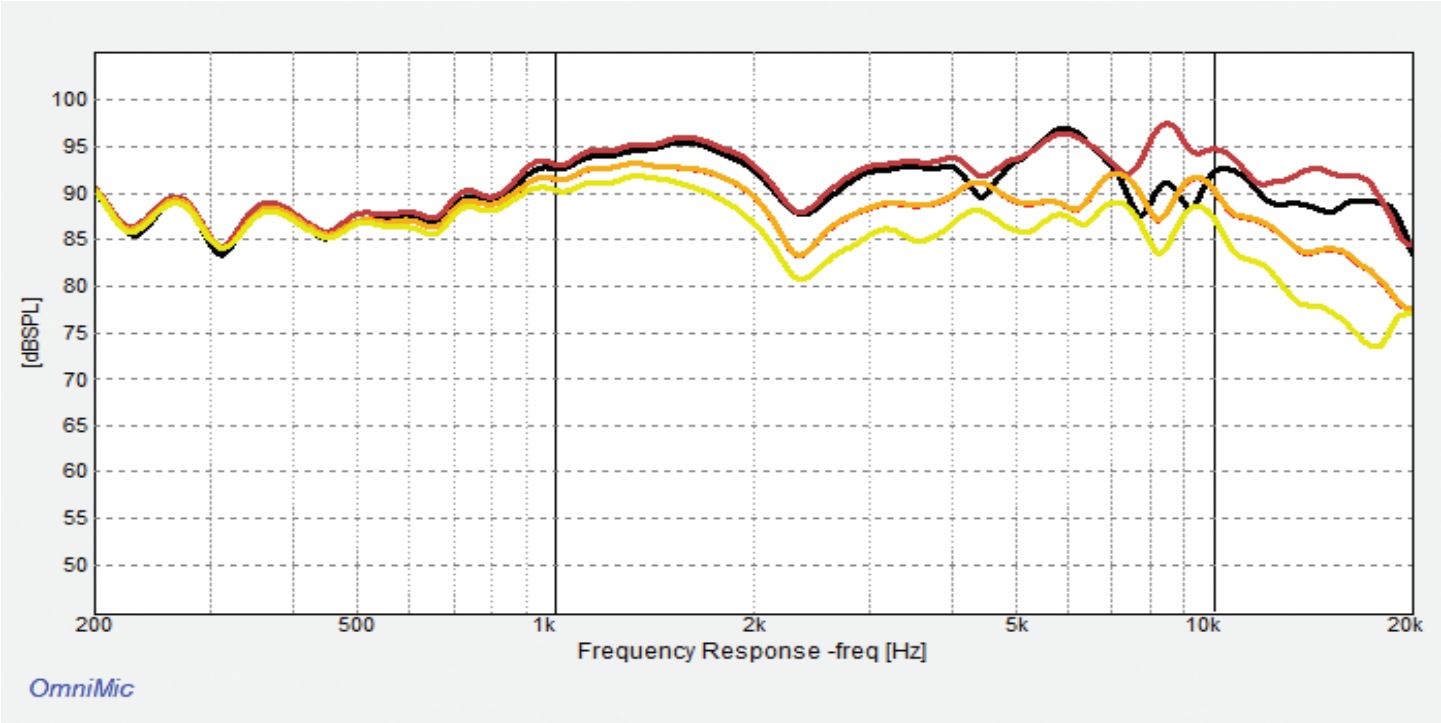

Dimensions:

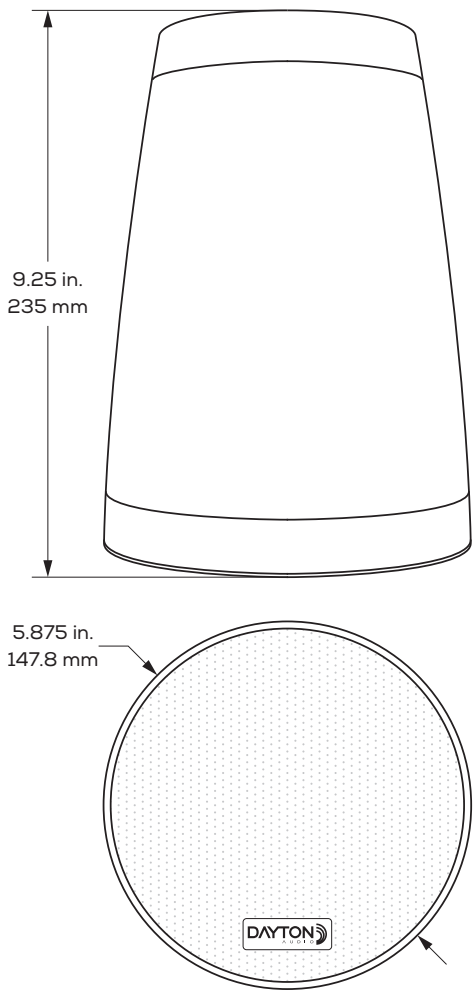

Impedance:

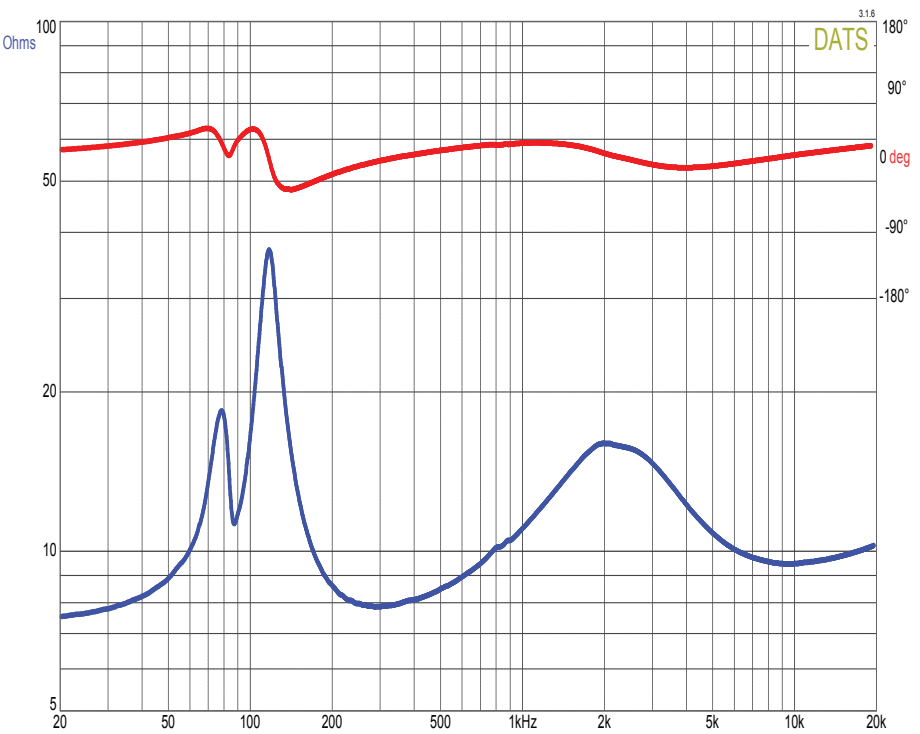

daytonaudio.com
tel + 937.743.8248
info@daytonaudio.com

705 Pleasant Valley Dr.
Springboro, OH 45066
USA