



SIM 7.3-Channel Sim Racer Amplifier Board 10 x 60W

Quick Start Wiring Guide

Model: SAB-1060

1. LED Status Light (Amp 1)
2. Speaker Outputs: FR, FL, Sub2, Center, Sub1 (J013)
3. LED Status Light (Amp 2)
4. LED Status Light (Amp 3)
5. LED Status Light (Amp 4)
6. Speaker Outputs: SSL, SSR, Sub3, RR, RL (J012)
7. 15 to 30 VDC Input (24V 200W Min. Recommended for 75W Peak Output)
8. LED Status Light (Amp 5)
9. Fan Power Output
10. LED Status Light (USB Signal)
11. USB-C Audio Input
12. LED Status Light (Error)
13. LED Status Light (Clipping)
14. Control Connector for On/Off and Mute
15. External/Internal Sync Switch

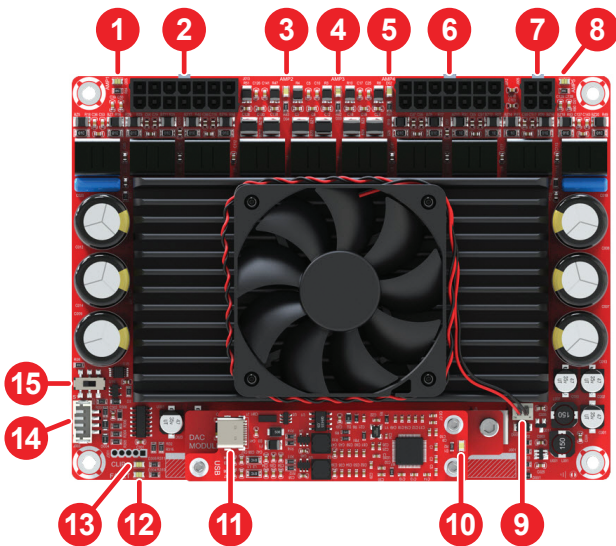

SSR	SIDE RIGHT CH
SSL	SIDE LEFT CH
CEN	CENTER CH
SUB1-3	LFE CHANNEL
RL	REAR LEFT CH
RR	REAR RIGHT CH
FL	FRONT LEFT CH
FR	FRONT RIGHT CH