

DAYTONAUDIO



YOUR HOME  
YOUR MUSIC  
TOTAL CONTROL

## DAYTON AUDIO DAX88

### 8-Source 8-Zone Distributed Audio Matrix Amplifier

Dayton Audio's DAX88 8-Source, 8-Zone Distributed Audio Matrix Amplifier hands you the definitive multi-zone Wi-Fi audio experience. With a comprehensive and straightforward to use mobile control app, Matrio™, the DAX88 liberates you to listen to your music on your terms, no matter where you are in your house or business. The flexibility of six amplified zones and two line-level preamp zones allow you to use the DAX88 with your choice of speakers. Whether installed for residential or commercial use, the DAX88 provides you complete sonic freedom. **Plain and simple.**

Powered By  
Matrio™ Control App





Total control of individual zones in the palm of your hand



Create a group to control settings for multiple zones at the same time

## DEMO MATRIO™ NOW


Download the app for free from the iOS or Android app store and fully explore Matrio™ in demo mode without a DAX88 unit.



# Features

- 8-source, 8-zone true audio matrix amplifier delivers the ultimate customizable multi-zone audio experience engineered with an emphasis on simplicity, flexibility, and wireless control for both residential and commercial use
- Convenient, simple to use Matrio™ mobile app gives you total command of all DAX88 features in the palm of your hand
- A wide array of analog and digital inputs, including integrated Wi-Fi (AirPlay, Spotify Connect, DLNA) streaming options that allow you to use your preferred music services such as Spotify, Apple Music, Amazon Music, Pandora, TIDAL, and many more (Additional hardware and or paid subscription may be required for Pandora, Amazon Music, and other streaming services if using Android devices)
- Six stereo amplified zones and two stereo preamp zones ensure a simplified installation process that gives you the option to choose your speaker system or upgrade an existing system
- Connect multiple DAX88 units to your network for unlimited system expansion, so you never run out of audio options
- Optional keypads, keypad hub, IR remote, and an integrated serial port for RS232 commands increase control accessibility to offer additional whole-home integration

## Example Configuration

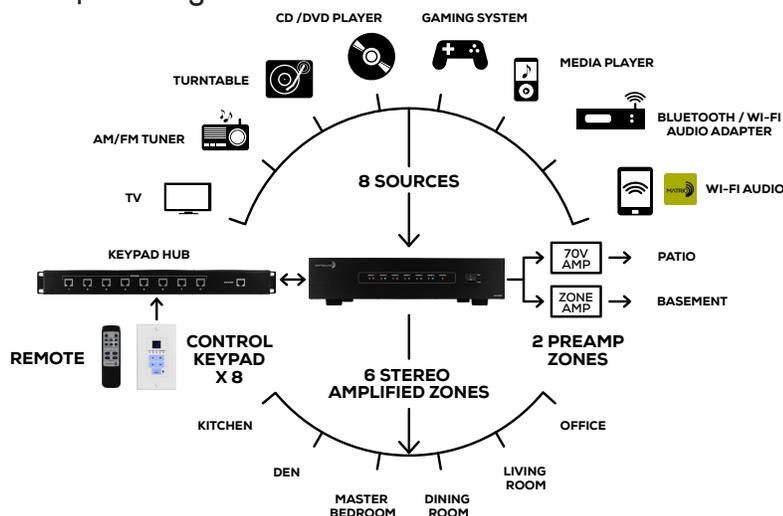

# Specs

- Channels:** 6 x Stereo Amplified, 2 x Stereo Preamp
- RMS Power (All Channels Driven):** 75 WPC @ 8 Ohms, 80 WPC @ 4 Ohms, 180 WPC @ 8 Ohms Bridged
- Inputs:** 4 x RCA, 7 x 3.5mm, 2 x Optical, 1 x Wi-Fi Audio Streaming (AirPlay, Spotify Connect, DLNA)
- Output Connectors:** 6 x 4-Pole Phoenix-Type Connectors, 2 x RCA
- S/N Ratio:** >87 dB
- THD:** 0.60%
- Frequency Response:** 20-20,000 Hz
- Amplifier Protection:** Overload, Short Circuit, Thermal
- Trigger System:** DC 12V
- Automation Control:** RS232 Serial Control
- Power Supply (Switchable):** AC 115V/60Hz, 230V/50Hz
- Power Consumption:** 23W (Standby), 1031W (Max)
- Dimensions:** 16.75" W x 4" (incl feet) H x 14.25" D
- Weight:** 17.3 Lbs
- Warranty:** 5 Years



To Learn More  
Scan Here!

[www.daytonaudio.com/topic/DAX88](http://www.daytonaudio.com/topic/DAX88)

